



Key Features

- Provide both line to replace T5 H0 & regular T5 tube
- DLC Listed
- High lumen Efficiency
- 25W/13W with 3300lm/1600lm
- Suitable for splash zones of food equipment
- High CRI (83+)
- 50,000 hour life
- Direct replacement for T5 linear fluorescent
- Excellent distribution with 180° beam angle
- Fits into existing linear fixtures
- Compatible with most Instant Start Ballast & Rapid Start Ballast*

* Check the ballast compatible list on our website www.turolight.com

Other information

- Operating temperature range between -20°C and +45°C
- UL/cUL, RoHS compliant
- 5-year limited warranty for DLC listed lamps / 3-year limited warranty for non-DLC in commercial and residential use (not recommended to use with ballast 7 years or older)



Conforms to NSF/ANSI 2


Applications

- Offices
- Hospitality
- Retail
- Shopping Malls
- Restaurants

General Usage

- Ideal replacement of Fluorescent T5 Tubes

Dimensions

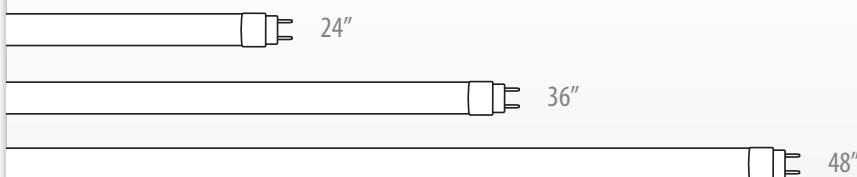

Order Code	Model Number	Description	DLC	Watts (Lamp)	Watts (System)	Base	Voltage (V)	Beam Angle	Initial Lumens	CCT (K)	CRI	MOL (in)
T5 Direct Fit Shatterproof- HO												
1762351	VIV-T5DFSP4/9W/35/F	T5 Direct Fit 2ft 9W G5 35K Frost Shatterproof	-	9	12	G5	120-277,347	180°	1000	3500	≥83	24
1762848	VIV-T5DFSP4/9W/40/F	T5 Direct Fit 2ft 9W G5 40K Frost Shatterproof	-	9	12	G5	120-277,347	180°	1000	4000	≥83	24
1762529	VIV-T5DFSP4/9W/50/F	T5 Direct Fit 2ft 9W G5 50K Frost Shatterproof	-	9	12	G5	120-277,347	180°	1000	5000	≥83	24
1763314	VIV-T5DFSP4/18W/35/F	T5 Direct Fit 3ft 18W G5 35K Frost Shatterproof	-	18	21	G5	120-277,347	180°	1700	3500	≥83	36
1763434	VIV-T5DFSP4/18W/40/F	T5 Direct Fit 3ft 18W G5 40K Frost Shatterproof	-	18	21	G5	120-277,347	180°	1700	4000	≥83	36
1763513	VIV-T5DFSP4/18W/50/F	T5 Direct Fit 3ft 18W G5 50K Frost Shatterproof	-	18	21	G5	120-277,347	180°	1700	5000	≥83	36
1764208	VIV-T5DFSP4/25W/30/F	T5 Direct Fit 4ft 25W G5 30K Frost Shatterproof		25	28	G5	120-277,347	180°	3150	3000	≥83	48
1764304	VIV-T5DFSP4/25W/35/F	T5 Direct Fit 4ft 25W G5 35K Frost Shatterproof		25	28	G5	120-277,347	180°	3150	3500	≥83	48
1764404	VIV-T5DFSP4/25W/40/F	T5 Direct Fit 4ft 25W G5 40K Frost Shatterproof		25	28	G5	120-277,347	180°	3200	4000	≥83	48
1764505	VIV-T5DFSP4/25W/50/F	T5 Direct Fit 4ft 25W G5 50K Frost Shatterproof		25	28	G5	120-277,347	180°	3300	5000	≥83	48
T5 Direct Fit Shatterproof- HE												
1762352	VIV-T5DFSP4/6W/35/F	T5 Direct Fit 2ft 6W G5 35K Frost Shatterproof	-	6	9	G5	120-277,347	180°	750	3500	≥83	24
1762849	VIV-T5DFSP4/6W/40/F	T5 Direct Fit 2ft 6W G5 40K Frost Shatterproof	-	6	9	G5	120-277,347	180°	750	4000	≥83	24
1762530	VIV-T5DFSP4/6W/50/F	T5 Direct Fit 2ft 6W G5 50K Frost Shatterproof	-	6	9	G5	120-277,347	180°	750	5000	≥83	24
1762353	VIV-T5DFSP4/9W/35/F/3FT	T5 Direct Fit 3ft 9W G5 35K Frost Shatterproof	-	9	12	G5	120-277,347	180°	1000	3500	≥83	36
1762850	VIV-T5DFSP4/9W/40/F/3FT	T5 Direct Fit 3ft 9W G5 40K Frost Shatterproof	-	9	12	G5	120-277,347	180°	1000	4000	≥83	36
1762531	VIV-T5DFSP4/9W/50/F/3FT	T5 Direct Fit 3ft 9W G5 50K Frost Shatterproof	-	9	12	G5	120-277,347	180°	1000	5000	≥83	36
1762354	VIV-T5DFSP4/13W/35/F	T5 Direct Fit 4ft 13W G5 35K Frost Shatterproof		13	16	G5	120-277,347	180°	1600	3500	≥83	48
1762851	VIV-T5DFSP4/13W/40/F	T5 Direct Fit 4ft 13W G5 40K Frost Shatterproof		13	16	G5	120-277,347	180°	1600	4000	≥83	48
1762532	VIV-T5DFSP4/13W/50/F	T5 Direct Fit 4ft 13W G5 50K Frost Shatterproof		13	16	G5	120-277,347	180°	1600	5000	≥83	48

For the latest stock status please refer to your price list or send us an email at sales@turolight.com

How to read: VIV / T5 DF SP4 / 9W / 35 / F

PLEASE CONSULT OUR LIST OF COMPATIBLE BALLASTS: ([HTTP://WWW.TUROLIGHT.COM/DCL](http://www.turolight.com/DCL))
 WE RECOMMEND CHECKING THE BRAND AND AGE OF THE EXISTING BALLAST BEFORE INSTALLATION.
 SOCKETS MUST BE SHUNTED AND IN NEW CONDITION.

Distributed by: