

SSL LED Canopy Fixture



Physical Features

- Ultra Thin design
- Sealed die-casting profile for clean appearance
- Polycarbonate optical lens with heat resistant
- Equipped with three 1/2" threaded conduit and one 3/4" conduit entry points



Application

- Warehouses
- Storage Facilities
- Low Ceiling Areas
- Garages


Electronic Features

- Stable lumen output and high lumen maintenance
- 40W-65W Replaces 100W-175W MH
- CRI (70+)
- Long life span of 50,000 hours
- Sealed die-casting body for durability
- UL certified for wet locations
- High power factor (>0.90)
- Working temperature ranges from -25° to +40°
- Motion Sensor (optional)
- Instant on, instant bright

Other information

- cUL listed and DLC listed
- 5-year limited warranty for DLC approved

Drawing/Dimension

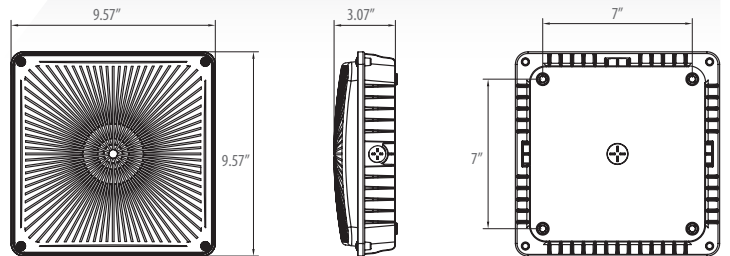

| Order Code | Model Number | Description | DLC | Watts | Volts (V) | Hour Rating | Optics/Distribution | Init. Lum. | CCT(K) | CRI | Dimensions LxWxH (inch) | Wet Loc | CS Qty. |
|------------|-------------------------|--|-----|-------|-----------|-------------|---------------------|------------|--------|-----|-------------------------|---------|---------|
| 3665107 | SSL-CP1/45W/50/UNV/BK | SSL 45W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black | | 45 | 120-277 | 50,000 | H160° x V160° | 4200 | 5000K | 70 | 9.57 x 9.57 x 3.07 | Y | 1 |
| 3665116 | SSL-CP1/45W/50/UNV/BK/D | SSL 45W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black, Dimmable | | 45 | 120-277 | 50,000 | H160° x V160° | 4200 | 5000K | 70 | 9.57 x 9.57 x 3.07 | Y | 1 |
| 3665201 | SSL-CP1/45W/50/347/BK/D | SSL 45W LED Canopy Light, 50K, 347V, Ultra Thin, Black, Dimmable | | 45 | 347 | 50,000 | H160° x V160° | 4200 | 5000K | 70 | 9.57 x 9.57 x 3.07 | Y | 1 |
| 3666114 | SSL-CP1/65W/50/UNV/BK/D | SSL 65W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black, Dimmable | | 65 | 120-277 | 50,000 | H160° x V160° | 6600 | 5000K | 70 | 9.57 x 9.57 x 3.07 | Y | 1 |
| 3666209 | SSL-CP1/65W/50/347/BK/D | SSL 65W LED Canopy Light, 50K, 347V, Ultra Thin, Black, Dimmable | | 65 | 347 | 50,000 | H160° x V160° | 6700 | 5000K | 70 | 9.57 x 9.57 x 3.07 | Y | 1 |

Ambient Operating Temperature -25°C ~ +40°C

For the latest stock status please refer to your price list or send us an email at sales@turolight.com

How our Model No. Works:

Ordering Information

| | | | | | | |
|--------|---------------|------------|--------------------|------------------------------|-------------|--------------|
| SSL | CP1 | 45W | 50 | UNV | BK | D |
| Family | Fixture Style | Wattage | Colour Temperature | Voltage | Body Finish | Dimmable |
| | CP1 - Canopy | 45W 65W | 50 - 5000K | UNV - 120-277V 347 - 347V | BK - Black | D - Dimmable |