

SSL LED Wall Pack Fixture (WP1)



Physical Features

- Lumileds luxeon LED chip
- Special housing connector plug design for easy installation and maintenance
- Independent LED lamp front housing and driver back-plate prevent the potential damage during the installation
- Better heat management
- Sealed die-casting body for durability
- Polycarbonate optical lens with UV stabilizers



Application

Perimeter and security lighting for entryway/pathway of buildings

Other information

- cUL listed and DLC listed
- 5-year limited warranty for DLC approved


Electronic Features

- Stable lumen output and high lumen maintenance
- 30W-145W Replaces 100W-400W MH
- High CRI (70+)
- Long life span of 50,000 hours
- Dark sky friendly
- UL certified for wet locations
- High power factor (>0.90)
- Working temperature ranges from -25° to +40°
- Photocell Sensor (optional)

Accessories



- Photocell sensor
- SSL LED Wall Pack Reflector Large/Medium

Dimensions / Drawing

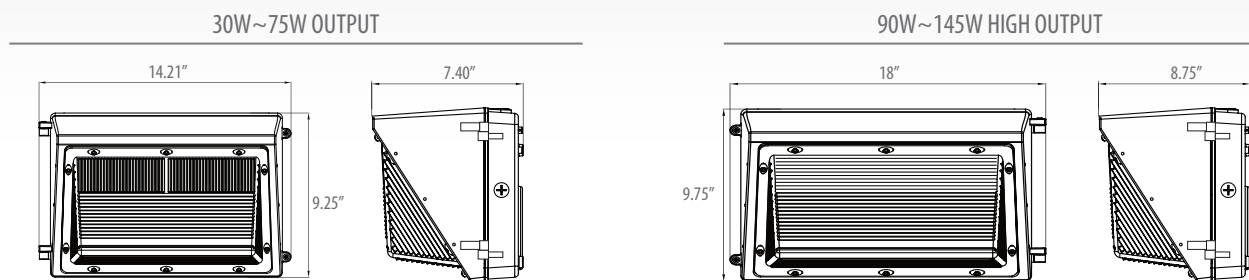

Wiring instruction (With Photocell)

Photocell

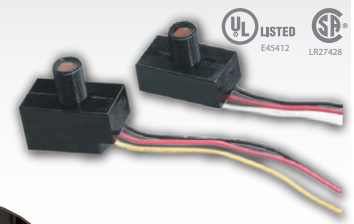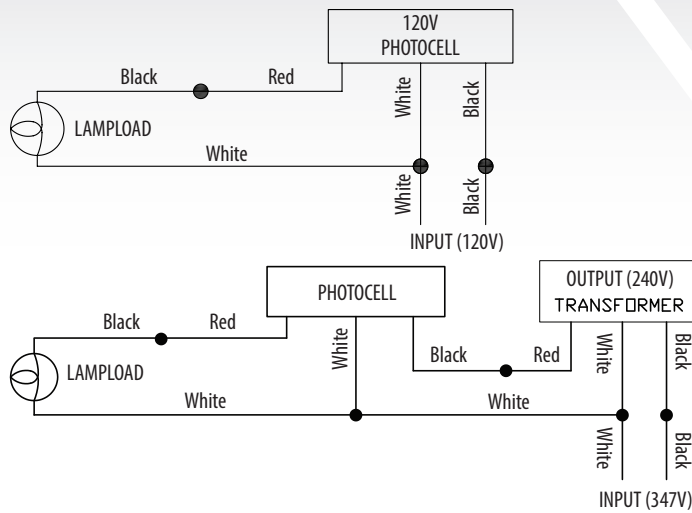

Order Code	Model Number	Description	DLC*	Fixture Type	Watts	Volts (V)	Hour Rating	Optics/Distribution	Init. Lum.	CCT (K)	CRI	Dimensions LxWxH (inch)	Wet Loc	CS Qty.
Wall Pack w/o Reflector														
3664110	SSL-WP1/30W/50/UNV/DB	SSL 30W LED Wall Pack, 50K, 100-277V, Dark Bronze	DLC	WP	30	100-277	50,000	H110° x V100°	3400	5000K	70	14.21 x 7.40 x 9.25	Y	1
3665108	SSL-WP1/45W/50/UNV/DB	SSL 45W LED Wall Pack, 50K, 100-277V, Dark Bronze	DLC	WP	45	100-277	50,000	H110° x V100°	5300	5000K	70	14.21 x 7.40 x 9.25	Y	1
3665202	SSL-WP1/40W/50/347/DB	SSL 40W LED Wall Pack 50K, 347V, Dark Bronze	DLC	WP	40	347	50,000	H110° x V100°	4700	5000K	70	14.21 x 7.40 x 9.25	Y	1
3666104	SSL-WP1/70W/50/UNV/DB	SSL 70W LED Wall Pack, 50K, 100-277V, Dark Bronze	DLC	WP	70	100-277	50,000	H110° x V100°	8100	5000K	70	14.21 x 7.40 x 9.25	Y	1
3666203	SSL-WP1/60W/50/347/DB	SSL 60W LED Wall Pack, 50K, 347V, Dark Bronze	DLC	WP	60	347	50,000	H110° x V100°	7000	5000K	70	14.21 x 7.40 x 9.25	Y	1
3666105	SSL-WP1/90W/50/UNV/DB	SSL 90W LED Wall Pack, 50K, 120-277V, Dark Bronze	DLC	WP	90	120-277	50,000	H110° x V90°	11200	5000K	70	18 x 8.75 x 9.75	Y	1
3666210	SSL-WP1/95W/50/347/DB	SSL 95W LED Wall Pack, 50K, 347V, Dark Bronze	-	WP	95	347	50,000	H110° x V90°	8500	5000K	70	18 x 8.75 x 9.75	Y	1
3667102	SSL-WP1/135W/50/UNV/DB	SSL 135W LED Wall Pack, 50K, 120-277V, Dark Bronze	DLC	WP	135	120-277	50,000	H110° x V90°	16400	5000K	70	18 x 8.75 x 9.75	Y	1
3667203	SSL-WP1/145W/50/347/DB	SSL 145W LED Wall Pack, 50K, 347V, Dark Bronze	-	WP	145	347	50,000	H110° x V90°	12000	5000K	>80	18 x 8.75 x 9.75	Y	1
Wall Pack Reflector														
3660001	SSL-WP/R/M	SSL LED Wall Pack Reflector Medium 40W-75W												
3660002	SSL-WP/R/L	SSL LED Wall Pack Reflector Large 90W-145W												
Accessories														
3660003	SSL-WPCP/45W/PS	45W Power Supply for Wall Pack & Canopy Light												
3660004	SSL-WPCP/70W/PS	70W Power Supply for Wall Pack & Canopy Light												
3660005	SSL-WP/50W/75W/347/TS	347V Transformer Set for 50W & 75W Wall Pack												
Photocell Sensor														
n.a.	LC-105	Photocell Sensor, for WP1 120V application only				120								
n.a.	AA-1068M	Photocell Sensor, for WP1 277V & 347V application only*				185-305								
n.a.	JL-403C	Photocell Sensor, for WP1 UNV & 347V application only*				120-277								

* Only applicable with 347V to 277V stepdown transformer

Ambient Operating Temperature -25°C ~ +40°C

For the latest stock status please refer to your price list or send us an email at sales@turolight.com

How our Model No. Works:

Ordering Information

SSL	WP1	30W	50	UNV	BK	R	PS
Family	Fixture Style	Wattage	Colour temperature	Voltage	Body Finish	DLC Reflector	Sensor Option
	WP1 - Wall Pack	30W/40W/45W 60W/70W 90W/95W 135W/145W	50 - 5000K	UNV - 120-277V 347 - 347V	DB - Dark Bronze	R - Reflector	PS - Photocell Sensor

Distributed by:



TO ORDER PLEASE CALL 1-877-736-0447 OR EMAIL: SALES@TUROLIGHT.COM

Tel: (416) 736-0447 • Toll Free: 1 (877) 736-0447 • Fax: (416) 736-4890 • Email: info@turolight.com • Website: www.turolight.com