

# SSL LED Canopy Fixture



## Physical Features

- Ultra Thin design
- Sealed die-casting profile for clean appearance
- Polycarbonate optical lens with heat resistant
- Equipped with three 1/2" threaded conduit and one 3/4" conduit entry points



## Application

- Warehouses
- Storage Facilities
- Low Ceiling Areas
- Garages


## Electronic Features

- Stable lumen output and high lumen maintenance
- 40W-65W Replaces 100W-175W MH
- CRI (70+)
- Long life span of 50,000 hours
- Sealed die-casting body for durability
- UL certified for wet locations
- High power factor (>0.90)
- Working temperature ranges from -25° to +40°
- Motion Sensor (optional)
- Instant on, instant bright

## Other information

- cUL listed and DLC listed
- 5-year limited warranty for DLC approved

## Drawing/Dimension

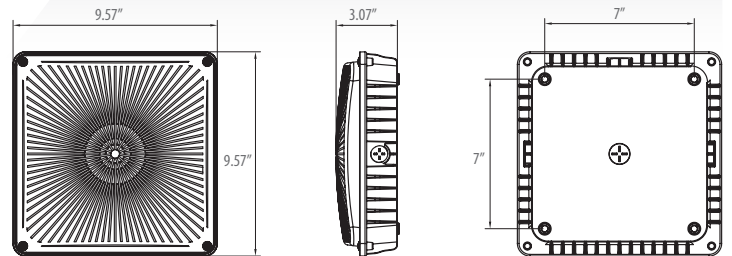

Order Code	Model Number	Description	DLC	Watts	Volts (V)	Hour Rating	Optics/Distribution	Init. Lum.	CCT(K)	CRI	Dimensions LxWxH (inch)	Wet Loc	CS Qty.
3665107	SSL-CP1/45W/50/UNV/BK	SSL 45W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black		45	120-277	50,000	H160° xV160°	4200	5000K	70	9.57x9.57x3.07	Y	1
3665116	SSL-CP1/45W/50/UNV/BK/D	SSL 45W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black, Dimmable		45	120-277	50,000	H160° xV160°	4200	5000K	70	9.57x9.57x3.07	Y	1
3665201	SSL-CP1/45W/50/347/BK/D	SSL 45W LED Canopy Light, 50K, 347V, Ultra Thin, Black, Dimmable		45	347	50,000	H160° xV160°	4200	5000K	70	9.57x9.57x3.07	Y	1
3666114	SSL-CP1/65W/50/UNV/BK/D	SSL 65W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black, Dimmable		65	120-277	50,000	H160° xV160°	6600	5000K	70	9.57x9.57x3.07	Y	1
3666209	SSL-CP1/65W/50/347/BK/D	SSL 65W LED Canopy Light, 50K, 347V, Ultra Thin, Black, Dimmable		65	347	50,000	H160° xV160°	6700	5000K	70	9.57x9.57x3.07	Y	1

Ambient Operating Temperature -25°C ~+40°C

For the latest stock status please refer to your price list or send us an email at [sales@turolight.com](mailto:sales@turolight.com)

How our Model No. Works:

## Ordering Information

SSL	CP1	45W	50	UNV	BK	D
Family	Fixture Style	Wattage	Colour Temperature	Voltage	Body Finish	Dimmable
	CP1 - Canopy	45W 65W	50 - 5000K	UNV - 120-277V 347 - 347V	BK - Black	D - Dimmable