



Key Features

- Direct replacement for T8 fluorescent Linear & U-Bend lamp
- 42W with 4500lm 8ft
13W with 1900lm 2ft
- DLC Listed
- 50,000 hour average life
- High CRI (83+)
- Excellent distribution with 180° beam angle
- No UV, no infrared and mercury free
- Instant on, no flicker or buzz
- Fits into existing linear fixtures
- Compatible with most Instant Start Ballast & Rapid Start Ballast*

* Check the ballast compatible list on our website www.turolight.com

Other information

- Operating temperature range between -20°C and +45°C
- UL/cUL listed, RoHS compliant
- 5-year limited warranty for DLC approved lamps / 3-year limited warranty for non-DLC in commercial and residential use (not recommended to use with ballast 7 years or older)




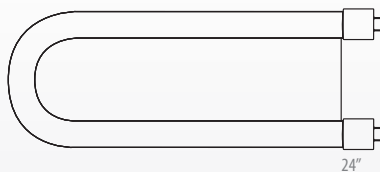
Applications





- Offices
- Hospitality
- Retail
- Shopping Malls
- Restaurants

General Usage

- Ideal replacement of Fluorescent T8 tubes

Dimensions



Order Code	Model Number	Description	DLC	Lamp Power	Sys. Power	Base	Voltage (V)	Init. Lum.	Beam Angle	CCT (K)	CRI	MOL (in)	CS Qty
Linear Tubes													
1765200	VIV-T8DF/42W/30/F	T8 Direct Fit 8ft 42W G13 30K Frost	-	38	42	Single Bin	120-277,347	4150	180°	3000	≥83	96	20
1765300	VIV-T8DF/42W/35/F	T8 Direct Fit 8ft 42W G13 35K Frost	-	38	42	Single Bin	120-277,347	4250	180°	3500	≥83	96	20
1765400	VIV-T8DF/42W/40/F	T8 Direct Fit 8ft 42W G13 40K Frost	-	38	42	Single Bin	120-277,347	4350	180°	4000	≥83	96	20
1765500	VIV-T8DF/42W/50/F	T8 Direct Fit 8ft 42W G13 50K Frost	-	38	42	Single Bin	120-277,347	4500	180°	5000	≥83	96	20
U-Bend Tubes													
1763218	VIV-T8DF/U/20W/30/F	T8 Direct Fit U-Bend 20W G13 30K Frost	-	17	20	G13	120-277,347	2000	180°	3000	≥83	24	24
1763301	VIV-T8DF/U/20W/35/F	T8 Direct Fit U-Bend 20W G13 35K Frost	-	17	20	G13	120-277,347	2050	180°	3500	≥83	24	24
1763417	VIV-T8DF/U/20W/40/F	T8 Direct Fit U-Bend 20W G13 40K Frost	-	17	20	G13	120-277,347	2100	180°	4000	≥83	24	24
1763502	VIV-T8DF/U/20W/50/F	T8 Direct Fit U-Bend 20W G13 50K Frost	-	17	20	G13	120-277,347	2200	180°	5000	≥83	24	24
1762783	VIV-T8DF4/U/13W/30/F	T8 Direct Fit U-Bend 13W G13 30K Frost DLC		13	16	G13	120-277,347	1800	180°	3000	≥83	24	24
1762363	VIV-T8DF4/U/13W/35/F	T8 Direct Fit U-Bend 13W G13 35K Frost DLC		13	16	G13	120-277,347	1800	180°	3500	≥83	24	24
1762865	VIV-T8DF4/U/13W/40/F	T8 Direct Fit U-Bend 13W G13 40K Frost DLC		13	16	G13	120-277,347	1850	180°	4000	≥83	24	24
1762540	VIV-T8DF4/U/13W/50/F	T8 Direct Fit U-Bend 13W G13 50K Frost DLC		13	16	G13	120-277,347	1900	180°	5000	≥83	24	24

For the latest stock status please refer to your price list or send us an email at sales@turolight.com

How to read:

VIV	/	T8	/	DF	/	U	/	13W	/	40	/	F
												

PLEASE CONSULT OUR LIST OF COMPATIBLE BALLASTS: ([HTTP://WWW.TUROLIGHT.COM/DCL](http://www.turolight.com/dcl))
WE RECOMMEND CHECKING THE BRAND AND AGE OF THE EXISTING BALLAST BEFORE INSTALLATION.
SHUNTED SOCKETS MUST BE USED.

Distributed by: