



Key Features

- 500 Lumens
- Energy Star Listed
- Dimmable
- 80+ CRI
- 25,000 hour average life
- Suitable for enclosed fixtures and damp locations
- Reduces energy consumption up to 80%
- No UV, no infrared and mercury free



Applications

- Hospitality
- Retail
- Art galleries and museums
- Shopping Malls
- Offices
- Restaurants
- Residential

General Usage


- Recessed Down Lights/Pot Lights
- Track Lights
- Specialty
- Under Cabinet Lights
- Display Cases

Other information

- Operating temperature range between -20°C and +45°C
- UL/cUL listed, FCC compliant, RoHS compliant
- 3-year limited warranty in commercial and residential use

Order Code	Model Number	ES	Watts	Base	Volts	Hour Rating	Beam Angle	Init. Lum.	C.B.C.P	CCT (K)	CRI	M.O.L (in)	Case Qty.
1762177	HD-MR16/7W/27/FL35/GU5.3/D		7	GU5.3	12	25,000	35°	500	1340	2700	80	2.0	50
1762257	HD-MR16/7W/30/FL35/GU5.3/D		7	GU5.3	12	25,000	35°	500	1345	3000	80	2.0	50
1762456	HD-MR16/7W/40/FL35/GU5.3/D		7	GU5.3	12	25,000	35°	500	1350	4000	80	2.0	50
1762129	HD-MR16/6.5W/27/FL35/GU10/D		6.5	GU10	120	25,000	35°	500	1330	2700	80	2.3	50
1762258	HD-MR16/6.5W/30/FL35/GU10/D		6.5	GU10	120	25,000	35°	500	1340	3000	80	2.3	50
1762457	HD-MR16/6.5W/40/FL35/GU10/D		6.5	GU10	120	25,000	35°	500	1346	4000	80	2.3	50
1762178	HD-MR16/6.5W/27/FL35/JDR/D		6.5	E26	120	25,000	35°	500	1330	2700	80	2.96	50
1762724	HD-MR16/6.5W/30/FL35/JDR/D		6.5	E26	120	25,000	35°	500	1340	3000	80	2.96	50
1762810	HD-MR16/6.5W/40/FL35/JDR/D		6.5	E26	120	25,000	35°	500	1346	4000	80	2.96	50

How to read: HD - MR16 / 6.5W / 27 / FL35 / GU10 / D
LED Class Lamp Type Wattage CCT(K) Beam Angle Lamp Base Dimmable

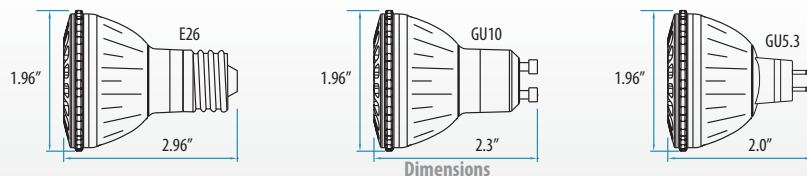

Distributed by: